



360 FLOATING SEAT

I N S T R U C T I O N S

For more instructions visit [SpartanMowers.com](https://www.SpartanMowers.com) or contact your local dealer.

360 FLOATING SEAT - KIT PARTS



Figure 1
Seat Latch



Figure 2
Floating Seat Base Plate



Figure 3
Universal Floating Seat Top Plate



Figures 4 & 5
Floating Seat Hardware

STEP 1

Install the three floating seat dampers as shown using the six 5/16" flange bolts and serrated nuts onto the lower seat plate.



STEP 2

Install the upper seat plate to the lower seat plate using the three 3/8" carriage bolts through the upper seat plate, dampers, large 3/8" washer and then the 3/8" nylon nut and tighten securely.



STEP 3

Remove the seat plate latch (if equipped) from the old seat plate by removing the 9/16" nylon nut from the seat latch, the 5/16" serrated nut and stud and install onto the new 360 floating seat plate. When installing the 3/8" nylon nut, do not tighten all the way down on the seat latch rod.



STEP 4

Unplug the seat safety switch and remove any zip ties holding the wire harness to the seat plate. Remove 5/16" nuts holding seat onto seat plate by using a 1/2" socket.

STEP 5

Remove the original seat plate from the GT Track bracket by using a 1/4" Allen wrench and a 9/16" wrench.



STEP 6

Remove the seat plate stop from the old seat plate and install onto the new 360 seat plate. When tightening the 5/16" nylon nut, tighten securely and then back off 1/8 turn.




STEP 7

Install the new 360 floating seat plate onto the GT Track bracket using the original hardware. Do not tighten the 9/16" nylon nut down all the way.



STEP 8

Install the seat in the appropriate location with the four original 5/16" nylon nuts and tighten securely.

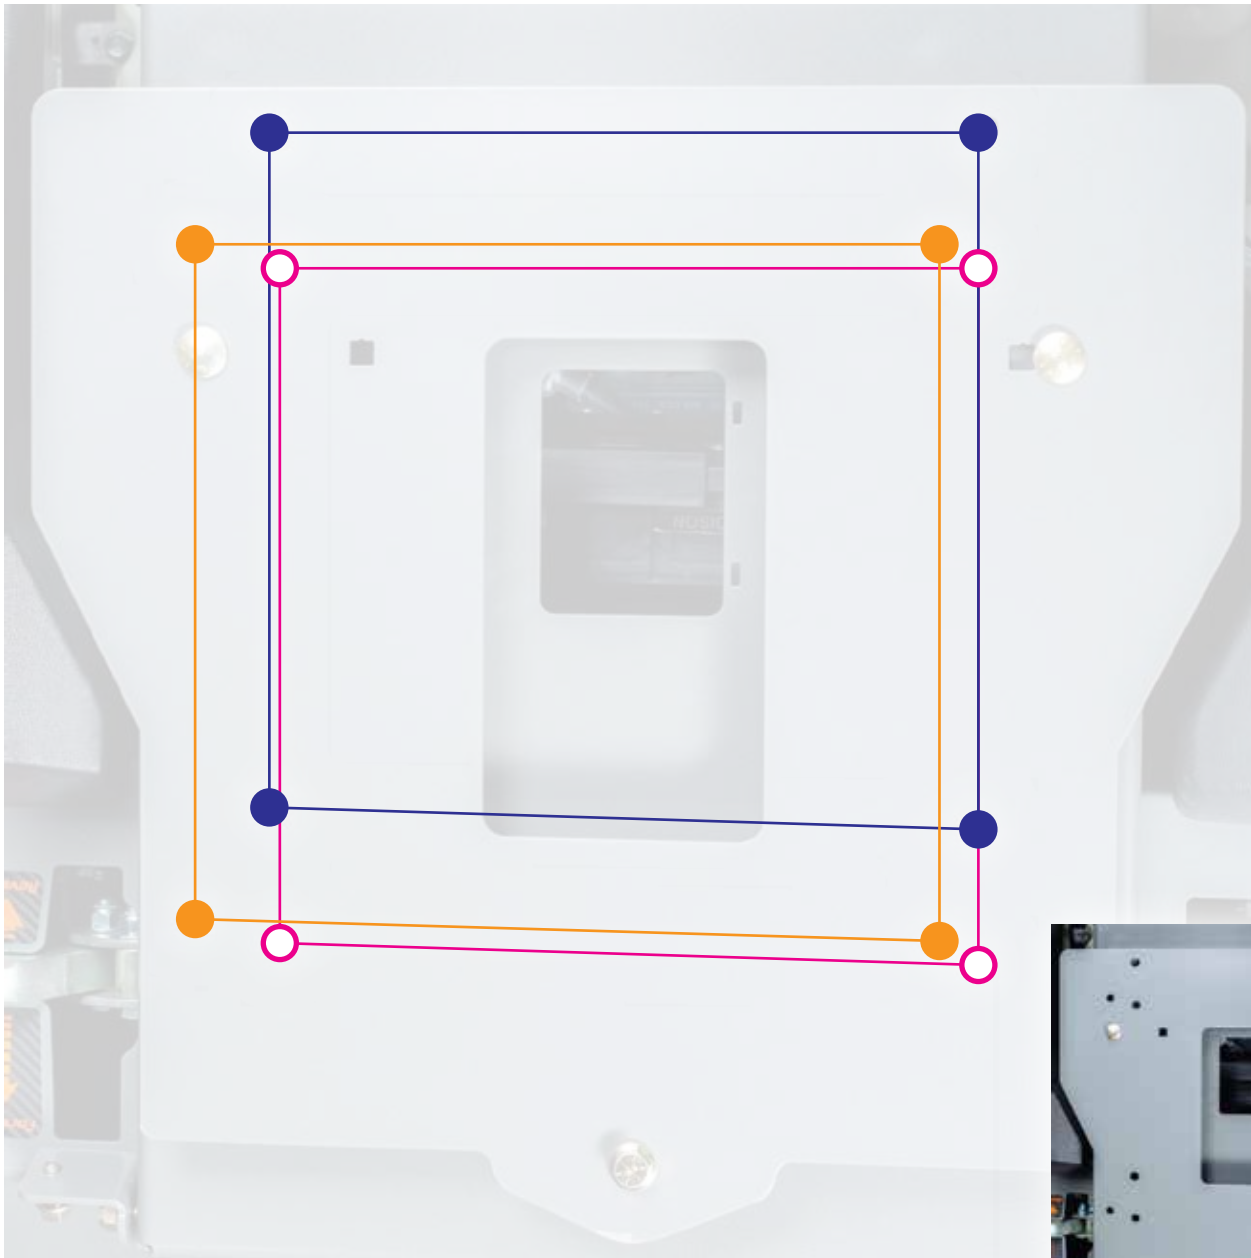

**Original Image for Reference*

- Fits RZ-HD, All Hugger & Full Suspension
- Fits RZ-HD, All Hugger & Full Suspension
- Fits Old Style RT & SRT

STEP 9

Plug seat safety switch wire to seat switch under the seat and zip tie wires as they were previously.

